
Sheet 1 of 1

Post Top Installation Fiberglass Pole 14 Foot Mounting Height

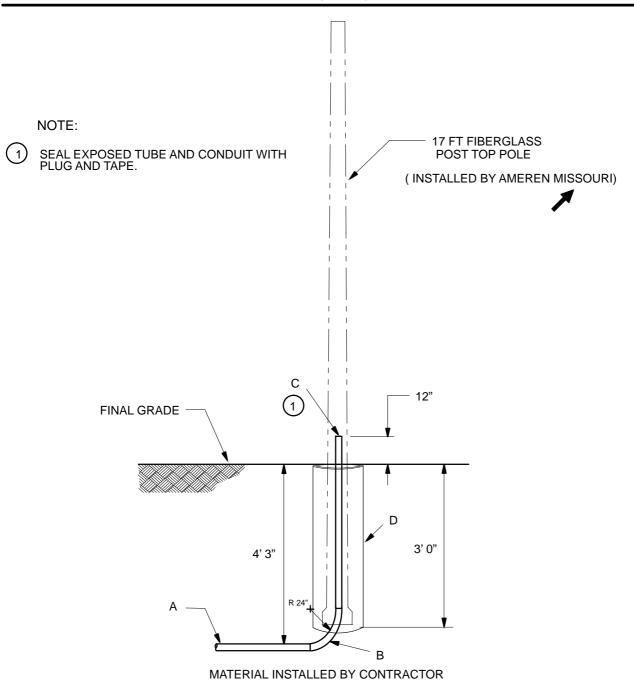

( DERIVED FROM CONSTRUCTION STANDARD 15 75 05 \*\* )

	Material / Stk. No.	Description	Qty.
Α	12 01 298	Conduit - Plastic, PVC, Sch. 40, 1-1/2" X 20' w Coupling	As Req'd
В	12 51 331	Bend - Plastic, 1-1/2", 24" Rad.	1
С	12 51 330	Plug – Conduit, Plastic, 1–1/2"	1
D		Pipe – Plastic Culvert, 15" I.D.	3'

1. Conduit must be centered in tube and both conduit and tube must be plumb before backfilling.



ENG: EJB REV. NO: 7

REV. DATE: 10/06/10